


PTZ Presets, Patrols & Patterns

The controls on the PTZ panel include:



1. **Directional Pad/Auto-scan Buttons:** Controls the movements and directions of the PTZ. Center button is also used to start auto-scan of PTZ.
2. **Speed:** Adjusts the movement speed of the PTZ.
3. **Zoom:** Used to zoom in and out with the PTZ.
4. **Focus:** Used to adjust the focus of the PTZ.
5. **Iris:** Used to open up or close the iris of the PTZ.
6. **Preset:** A Preset is a position that the camera is in which is saved to memory to be retrieved later. Choose this button to enter preset configuration menu.
7. **Patrol:** Initiates patrol mode. You'll need to define a series of Preset points for the camera to patrol between. Choose this button to enter patrol configuration menu.
8. **Exit:** Closes the PTZ controls.

PTZ Context Menu

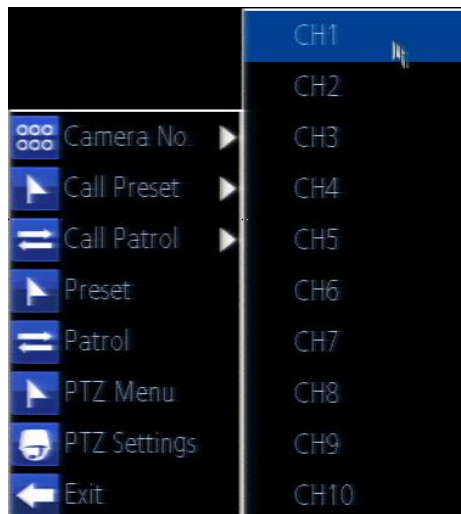

1. **Camera No:** Switch quickly between cameras.
2. **Call Preset:** Returns the camera to a Preset point.
3. **Call Patrol:** Initiates a patrol of your choice.
4. **Preset:** Defines a Preset point.
5. **Patrol:** Initiates or stops a patrol.
6. **PTZ Menu:** Toggles the appearance of the PTZ Control Menu onscreen. While the PTZ Control Menu is hidden, the DVR will still be in PTZ mode, and the context menu can still be opened via right-clicking the interface.
7. **PTZ Settings:** Opens the PTZ Settings menu, where you can adjust the control method for the camera.